

Single hole transistor in a p-Si/SiGe quantum well

U. Dötsch¹, U. Gennser¹, T. Heinzel², S. Lüscher², C. David¹, G. Dehlinger¹, D. Grützmacher¹, and K. Ensslin²

¹Paul Scherrer Institute, 5232 Villigen PSI, Switzerland

²Solid State Physics Laboratory, ETH Zürich, 8093 Zürich, Switzerland

(February 1, 2008)

A single hole transistor is patterned in a p-Si/SiGe quantum well by applying voltages to nanostructured top gate electrodes. Gating is achieved by oxidizing the etched semiconductor surface and the mesa walls before evaporation of the top gates. Pronounced Coulomb blockade effects are observed at small coupling of the transistor island to source and drain.

Transport through small metallic islands, defined in semiconductor heterostructures, has been of considerable interest recently.¹ When the island is only weakly coupled to reservoirs via tunnel barriers, the Coulomb blockade (CB) effect determines the carrier transport. In such islands, the interplay between interactions and size quantization can be studied. A large number of experiments have investigated the properties of single electron transistors made out of conventional metals, and of high mobility, low density two-dimensional electron gases, defined in mostly Ga[Al]As or Si, among other materials.¹ Single hole transistors out of p-Si/SiGe quantum wells are of particular interest for several reasons: (i) the material has a large g-factor of $g_{eff} = 6.7$ and a large effective mass ($m^* = 0.25$), (ii) the interaction parameter r_S , defined as the ratio between the Coulomb energy of two holes at their average separation, and the Fermi energy, is very large, i.e., $r_S \approx 4$ for typical carrier densities, and (iii) the properties of the quantum well are strongly influenced by biaxial strain, due to the lattice mismatch at the Si/SiGe interface.

However, p-SiGe has been notoriously difficult to gate, due to leakage currents across the Schottky barrier.^{2,3} Recently, progress has been reported in this respect. Emeleus et al.⁴ have tuned the hole density in a p-Si/SiGe quantum well using a homogenous back gate. This method, however, cannot be applied for the production of nanostructured gates. Homogeneous top-gating of this material has been reported as well.⁵ In those samples, the two-dimensional hole gas (2DHG) is buried very deeply below the surface, which limits the pattern transfer into the 2DHG. To our knowledge, the fabrication of any kind of gated nanostructure in p-Si/SiGe has not been reported yet. It should be noted that small islands and wires have been patterned out of p-Si/Si_{1-x}Ge_x/Si resonant tunneling structures by etching.⁶ Furthermore, single hole charging effects have been observed in p-Si⁷ and in two-terminal, δ -doped SiGe devices⁸.

Here, we present the fabrication and characterization of a gated single hole transistor in a p-Si/SiGe quantum well. The gate leakage is reduced by oxidizing the etched surface before the definition of the top gates. At low temperatures, we observe, clear single hole tunneling and CB oscillations.

The samples have been grown by molecular beam epi-

taxy, and contain a 200Å Si_{0.85}Ge_{0.15} layer on top of an undoped Si substrate, a 150Å B-doped Si layer with a setback of 180Å from the well, and a 200Å undoped Si cap. The Si_{0.85}Ge_{0.15} layer forms a triangular potential well for the two-dimensional hole gas (Fig. 1a). Due to the lattice mismatch between Si and Si_{0.85}Ge_{0.15}, the heavy hole ($m_J = \pm 3/2$) potential is split from the light hole ($m_J = \pm 1/2$) potential, and ensures that the lowest occupied bound state has heavy hole character. The hole density of the ungated 2DHG is $p_{2D} = 3.6 \times 10^{15} \text{m}^{-2}$, and an elastic mean free path of $l_e = 100 \text{ nm}$ is obtained from magnetoresistivity measurements.

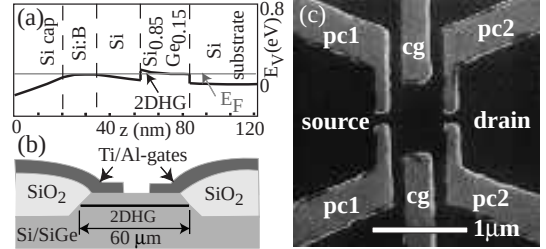


FIG. 1. (a) Top of the valence band of the Si/SiGe quantum well. The hole gas resides at the Si/Si_{0.85}Ge_{0.15} interface 53 nm below the surface. (b) Schematic cross section through the processed heterostructure. In order to reduce leakage currents, the mesa edges are separated from the top gate by a SiO₂ layer. (c) Scanning electron micrograph of the gate geometry. The Ti/Al gates appear as bright areas.

Tests have indicated that in our samples, large leakage currents between the top gate and the 2DHG can flow across the mesa edge. Therefore, we have deposited a layer of SiO₂ by thermal evaporation right after the reactive ion etch that defines the mesa, i.e., with the photoresist still on the mesa. We have used this technique in earlier work for the fabrication of homogeneous gates, Fig. 1b.⁹ After lift-off of the oxide, the top gate (10 nm Ti and 20 nm Al) was patterned by electron beam lithography and thermal evaporation. This sequence of technology steps reduces leakage currents in our samples significantly.

The geometry of the gates is crucial. While deposition of a *homogeneous* Ti/Al gate reduces p_{2D} by roughly a factor of two due to pinning effects, we find that for grounded gates in the sub-micron regime, the 2DHG is

depleted underneath, with a lateral depletion length of roughly 100 nm. This depletion is probably caused by strain and pinning on defects, which complicates a simulation of the device. Preliminary experimental studies on split gates with various openings w between the two electrodes were used to develop the gate geometry. For $w < 100$ nm, we were unable to open the channel between the split gates without simultaneously populating the regions below the gates. For $w > 250$ nm, the channels could not be pinched off. Also, the pinch-off voltage of split gates with identical geometry can be quite different. In Fig. 1c, the island geometry is shown. Three split gate electrodes (point contact gates pc1, pc2, as well as the center gates cg) define the dot with a lithographic size of $500 \text{ nm} \times 800 \text{ nm}$. For pc1 and pc2, $w = 150$ nm was chosen.

The measurements have been carried out in a $^3\text{He}/^4\text{He}$ dilution refrigerator with a base temperature of 90 mK. DC voltages are applied between source and drain, and the current is measured with a resolution of ≈ 500 fA.

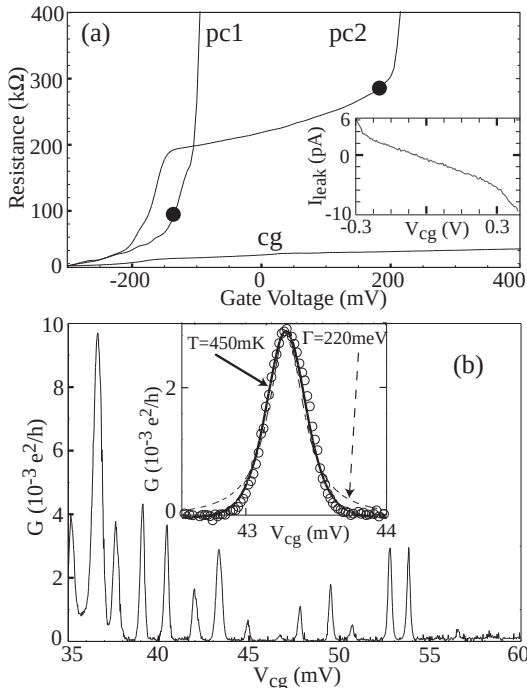


FIG. 2. (a) Resistance of the 3 split gates as a function of the gate voltages V_{pc1} , V_{pc2} , and V_{cg} , respectively. The circles denote the working points of gates pc1 and pc2 for all subsequent measurements. The inset shows the leakage current of gate cg as a function of V_{cg} , which is typical for all gates. (b) Conductance G through the island as a function of V_{cg} , showing CB oscillations. Inset: blow-up of the peak at $V_{cg} = 43$ mV (open circles), fitted to a Lorentzian (dashed line), and to a thermally broadened CB resonance (solid line), see text.

We have studied two different quantum dots of identical geometry and performed several cooldowns, all lead-

ing to similar results. Here, we focus on the measurements from one device, taken in a single cooldown.

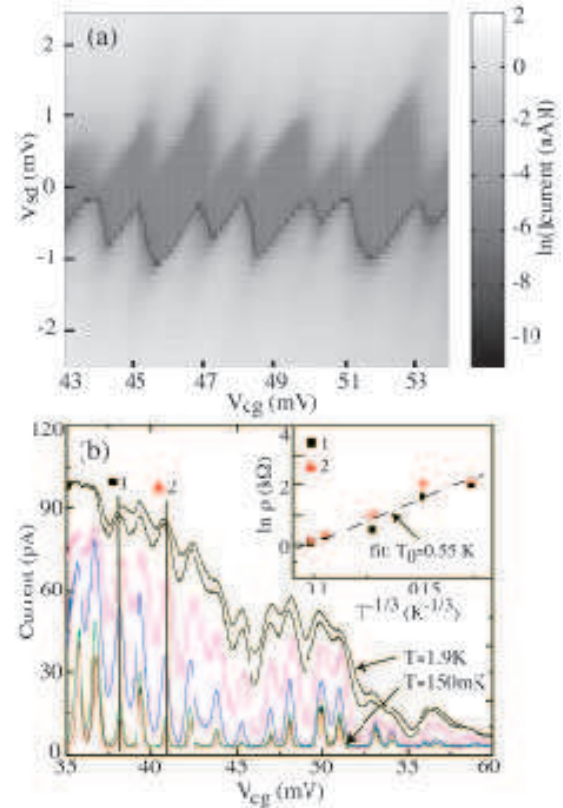


FIG. 3. (a) The Coulomb diamonds in a logarithmic gray scale plot. A possible origin of the modulation is discussed in the text. (b) Temperature dependence of the CB resonances. Besides a thermal smearing, a striking overall increase of G is observed as T increases. The inset shows $\ln(\rho)$ as a function of $T^{-1/3}$ at gate voltages 1 and 2, including a fit of the full squares. The approximately linear behavior indicates thermally activated transport through the island (see text).

Split gates pc1 and pc2 are used to adjust the coupling of the island to source and drain (Fig. 2a). Due to the small elastic mean free path, conductance quantization is not observed. The leakage currents measured at the center gates is shown in the inset of Fig. 2a. At sufficiently large split gate voltages V_{pc1} and V_{pc2} , CB oscillations are observed as a function of the center gate voltage V_{cg} (Fig. 2b).

The measured CB resonances can be fitted well to the expression describing a thermally smeared CB peak in the multi-level transport regime, i.e. $G(V_{cg}, T_h) = G_{max} \cosh^{-2}[\frac{\eta(V_{cg} - V_{max})}{2.5k_B T_h}]$.¹ Here, G_{max} and V_{max} denote the amplitude and the position of the CB resonance, respectively. The lever arm η translates V_{cg} into energy and is obtained from measurements of the CB diamonds (Fig. 3a). We find $\eta = 0.68$ eV/V. As fit parameter, we obtain hole temperatures of $T_h = 390$ mK to 570 mK, depending on the peak. A Lorentzian, on the other

hand, which is appropriate for homogeneously broadened resonances, fits significantly worse (inset in Fig. 2b). The full widths at half maximum (FWHMs) thus fluctuate strongly from peak to peak, and furthermore saturate for bath temperatures below 400 mK, as well as for source-drain bias voltages below $V_{sd} = 120 \mu\text{V}$. We conclude that neither the electron temperature, nor V_{sd} determine the FWHM in this regime ($T < 400 \text{ mK}$ and $V_{sd} < 120 \mu\text{V}$). Furthermore, we observe a pronounced pair modulation of the peak separations in this regime. Qualitatively similar modulations are observed in both devices and in all cooldowns, although the detailed structure varies strongly. A measurement of the Coulomb diamonds, i.e., the current as a function of both V_{sd} and V_{cg} is shown in Fig. 3a. The stability of the diamonds shows that there is little telegraph noise and switching at frequencies below 1 Hz, the bandwidth of our setup. However, noise of higher frequencies may be substantial; and gate voltage dependent charge rearrangements in the substrate may be present and could determine the FWHM of the CB peaks.

In Fig. 3b, we show the temperature dependence of the CB oscillations. Temperature dependent measurements support the interpretation in terms of a strongly disordered dot (Fig. 3b). As the temperature increases, not only the CB oscillations are smeared out, but also a striking overall increase in G is observed, which indicates thermally enhanced transport through the island. Since the conductance of the individual tunnel barriers, measured with positive voltages applied to the remaining gates, does not depend on temperature between 90 mK and 2 K, the observed overall increase of G is entirely due to the island. Several scenarios could lead to such a behavior, such as Variable-Range Hopping¹⁰ or Efros-Shklovskii hopping¹¹. Reasonable agreement with Variable-Range Hopping (i.e., $\rho \propto \exp[(T_0/T)^{1/3}]$) is found, and we can estimate the characteristic temperature from fits to $T_0 \approx 0.55K$. This result depends only weakly on V_{cg} . We cannot, however, distinguish between Variable-Range hopping and Efros-Schklovskii hopping, due to the limited range of temperatures.

Similar modulations of Coulomb diamonds have been observed in double dot systems for weak coupling between the dots.¹² Possibly, the modulation is thus an indication that at $V_{cg} \approx 40 \text{ mV}$, the island splits up into two smaller, weakly coupled puddles, due to disorder. The modulated diamonds then reflect the formation of a “molecular state”, or of a capacitance between the two puddles. A different number of puddles would result in a different modulation period. Since we can not tune the two puddles independently nor the coupling between them, we are unable to extract the puddle sizes and the interdot conductance. Nevertheless, this interpretation allows us to quantify the island in terms of capacitances. Within this interpretation, the *average* CB period in Fig. 3a corresponds to e/C_g , where e is the elementary

charge and C_g the capacitance between the total island and the center gates. The average distance between the diamond corners along the V_b -direction corresponds to twice the charging energy $E_C = e^2/C_\Sigma$ of the island: $\delta V_{sd} = 2e/C_\Sigma$. Here, C_Σ denotes the total capacitance of the island. From Fig. 3a, we find $C_\Sigma = 170 \text{ aF}$, which corresponds to a single electronic island radius of $r \approx 200 \text{ nm}$. Hence, the level spacing inside the dot can be estimated as $\Delta \approx 8 \mu\text{eV}$, which justifies our assumption of multilevel transport used above.

In summary, we have demonstrated that top gate defined nanostructures can be fabricated and operated on p-SiGe. The leakage currents can be significantly reduced by oxidizing the mesa edges before top gate deposition. We have observed Coulomb blockade on a top gate defined island in p-Si/SiGe. The island is strongly disordered, which manifests itself in thermally enhanced transport as well as in a possible puddle formation at small hole densities.

The authors would like to thank S. Graf for technical assistance. Financial support by the Swiss National Science Foundation and MINAST is gratefully acknowledged.

-
- ¹ For a review, see L.P. Kouwenhoven, C.M. Marcus, P.L. McEuen, S. Tarucha, R.M. Westervelt, and N.S. Wingreen, in “Mesoscopic Electron Transport”, Proceedings of a NATO Advanced Study Institute, eds. L.P. Kouwenhoven, G. Schön and L. L. Sohn, (Kluwer, Dordrecht, Netherlands, 1997), Ser. E, Vol. 345, pp. 105-214.
 - ² P.T. Coleridge, A.S. Sachrajda, H. Lafontaine, and Y. Feng, Phys. Rev. B **54**, 14518 (1996).
 - ³ S. Madhavi, V. Venkataraman, J.C. Sturm, and Y.H. Xie, Phys. Rev. B **61**, 15807 (2000).
 - ⁴ C.J. Emeleus, M.A. Sadeghzadeh, P.J. Phillips, E.W.H.C. Parker, T.E. Whall, M. Pepper, and A.G.R. Evans, Appl. Phys. Lett. **70**, 1870 (1997).
 - ⁵ M.A. Sadeghzadeh, Appl. Phys. Lett. **76**, 348 (2000).
 - ⁶ P.W. Lukey, J. Caro, T. Zijlstra, E. van der Drift, and S. Radelaar, Phys. Rev. B **57**, 7132 (1998); C.D. Akyüz, A. Zaslavsky, L.B. Freund, D.A. Syphers, and T.O. Sedgwick, Appl. Phys. Lett. **72**, 1739 (1998).
 - ⁷ E. Leonbandung, L. Guo, Y. Wang, and S.Y. Chou, J. Vac. Sci. Technol. **13**, 2865 (1995).
 - ⁸ D.J. Paul, J.R.A. Cleaver, H. Ahmed, and T.E. Whall, Phys. Rev. B **49**, 16514 (1994).
 - ⁹ V. Senz, T. Heinzel, T. Ihn, K. Ensslin, G. Dehlinger, D. Grützmacher, and U. Gennser, Phys. Rev. B **61**, R5082 (2000).
 - ¹⁰ N.F. Mott, Proc. R. Soc. London Ser. A **167**, 348 (1949).
 - ¹¹ A.L. Efros and B.I. Shklovskii, J. Phys. C **8**, L49 (1975).
 - ¹² C.H. Crouch, C. Livermore, R.M. Westervelt, K.L. Campman, and A.C. Gossard, Appl. Phys. Lett. **71**, 817 (1997).